

Universal D-Ring Model DRNG-U-1

1. GENERAL DESCRIPTION

The Universal D-Ring (Figure 1) is a versatile accessory for cable management in rack-mounted equipment installations. The rugged metal D-Ring easily attaches to the mounting rail of a 1RU rack space and provides mechanical support for twisted pair, coaxial, or fiber cable.

Document Status

Whenever this document is updated, the reason will be stated in this paragraph.

2. APPLICATION

The Universal D-Ring can be mounted to the left or right of a rack-mounted chassis on the front or back of a mounting rail. Cables are routed through the main rectangular opening and can also be inserted or removed through the angled slot at the face of the part.

3. INSTALLATION

- a) Align the slot on the back of the D-Ring with the holes of the mounting rail.
- b) Insert two screws (not supplied) through the inside of the D-Ring, as shown in Figure 2, and fasten them securely to the mounting rail. For mounting to preinstalled studs, use appropriately sized nuts and lock washers for fastening.
- c) Route cables through the D-ring opening, being sure to follow appropriate bend radius guidelines.
- d) Tie cables to the extended portions of the D-Ring frame.

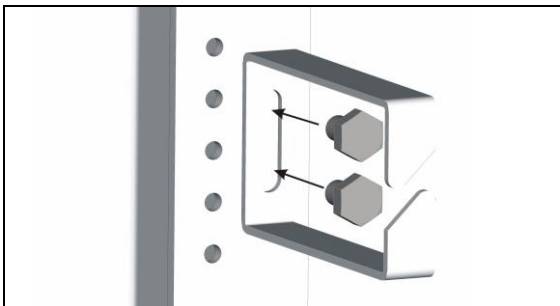


Figure 2. D-Ring installation

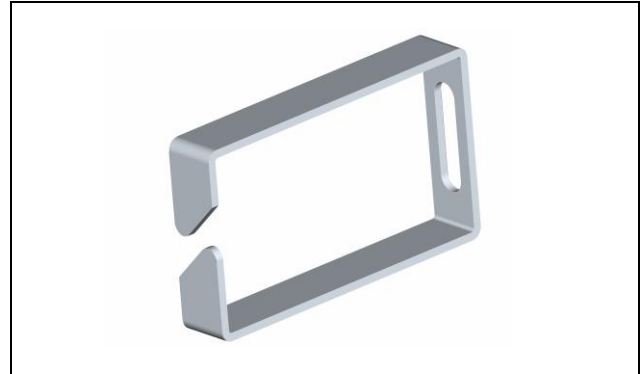


Figure 1. Universal D-Ring

4. CUSTOMER SERVICE

If technical or customer assistance is required, please contact Enginuity at the following address or phone number:

Enginuity Communications
3545 Stern Avenue
St. Charles, Illinois 60174
Toll Free: 1-800-980-3266
Voice: (630) 444-0778
www.enginuitycom.com

5. SPECIFICATIONS

Dimensions: 1.75"H x 0.5"W x 3.0"D

Weight: 2 oz.